



□ DIMENSIONS

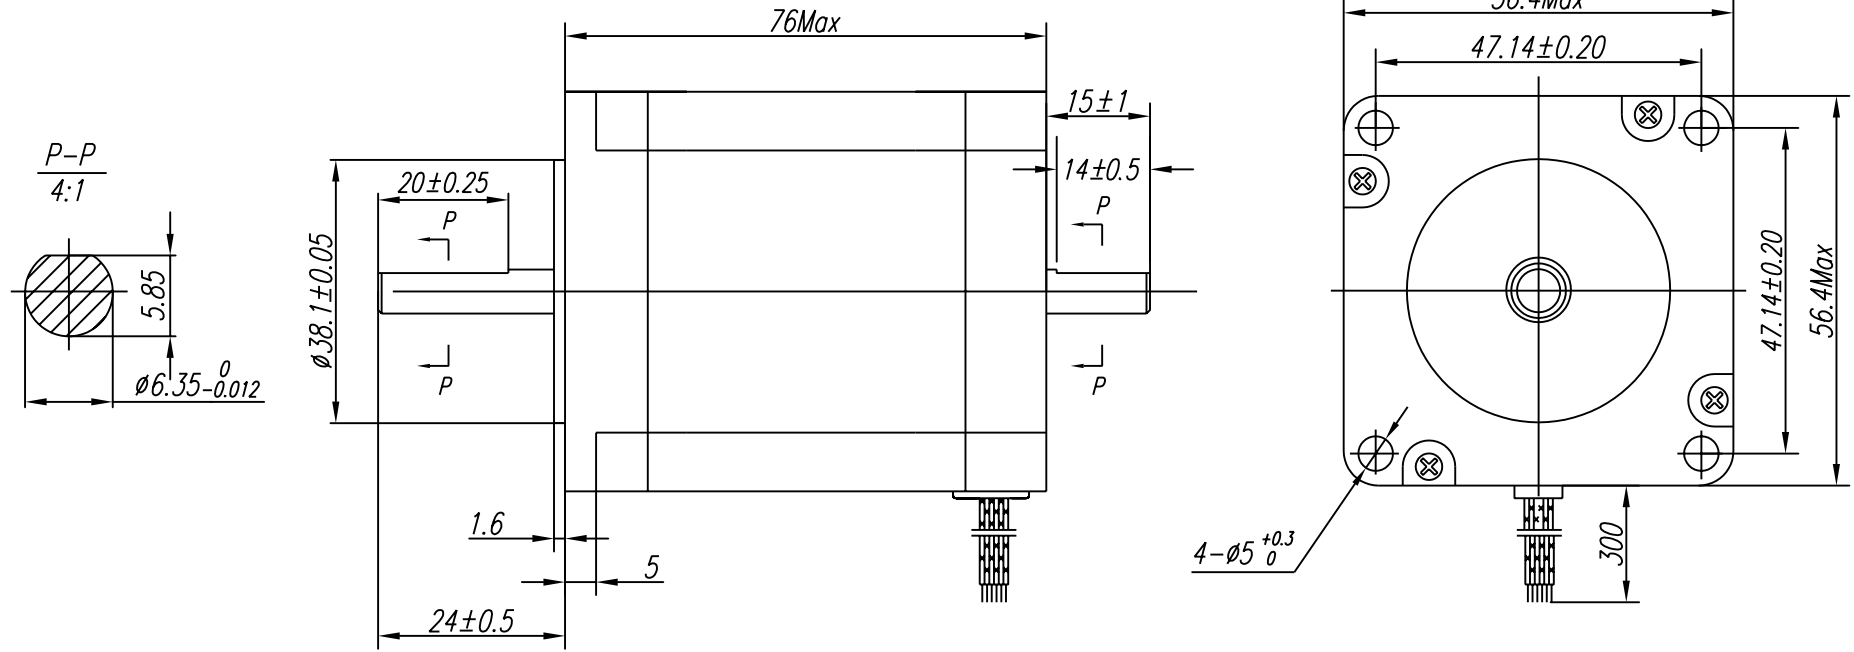

□ SPECIFICATIONS unit=mm

PHASE	2	PHASE	
STEP ANGLE	1.8±5%	°/STEP	
DETENT TORQUE	6	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG22 UL1007		
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL	BIPOLAR ONLY PARALLEL
CURRENT	3.0 A/PHASE	2.1 A/PHASE	4.2 A/PHASE
RESISTANCE	0.92 ±10% Ω/PHASE	1.84 ±10% Ω/PHASE	0.46 ±10% Ω/PHASE
INDUCTANCE	2.2 ±20% mH/PHASE	8.8 ±20% mH/PHASE	2.2 ±20% mH/PHASE
HOLDING TOGQUE	140 N.cm Min	200 N.cm Min	200 N.cm Min

□ COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

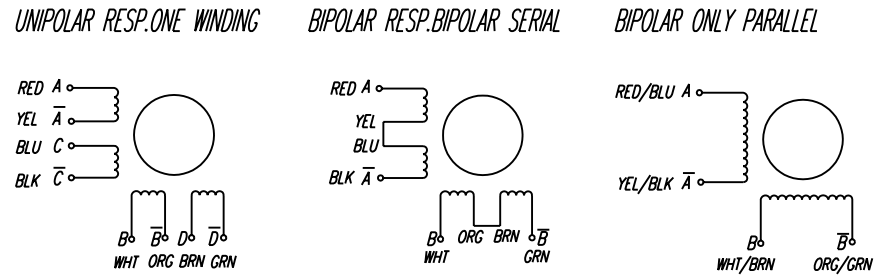

23-205-DS8

label:
23-205-DS8
3V 3A 1R
MADE IN CHINA
HobbyCNC.com

REV	QTY.	NO.	SIG.	DT.
DESIGN		CHECK		
PROC.		APPR.		
			CLS.MAK	WEIGHE
			SCALE	
			EDIT.	PAGE OF PAGES