



□ DIMENSIONS

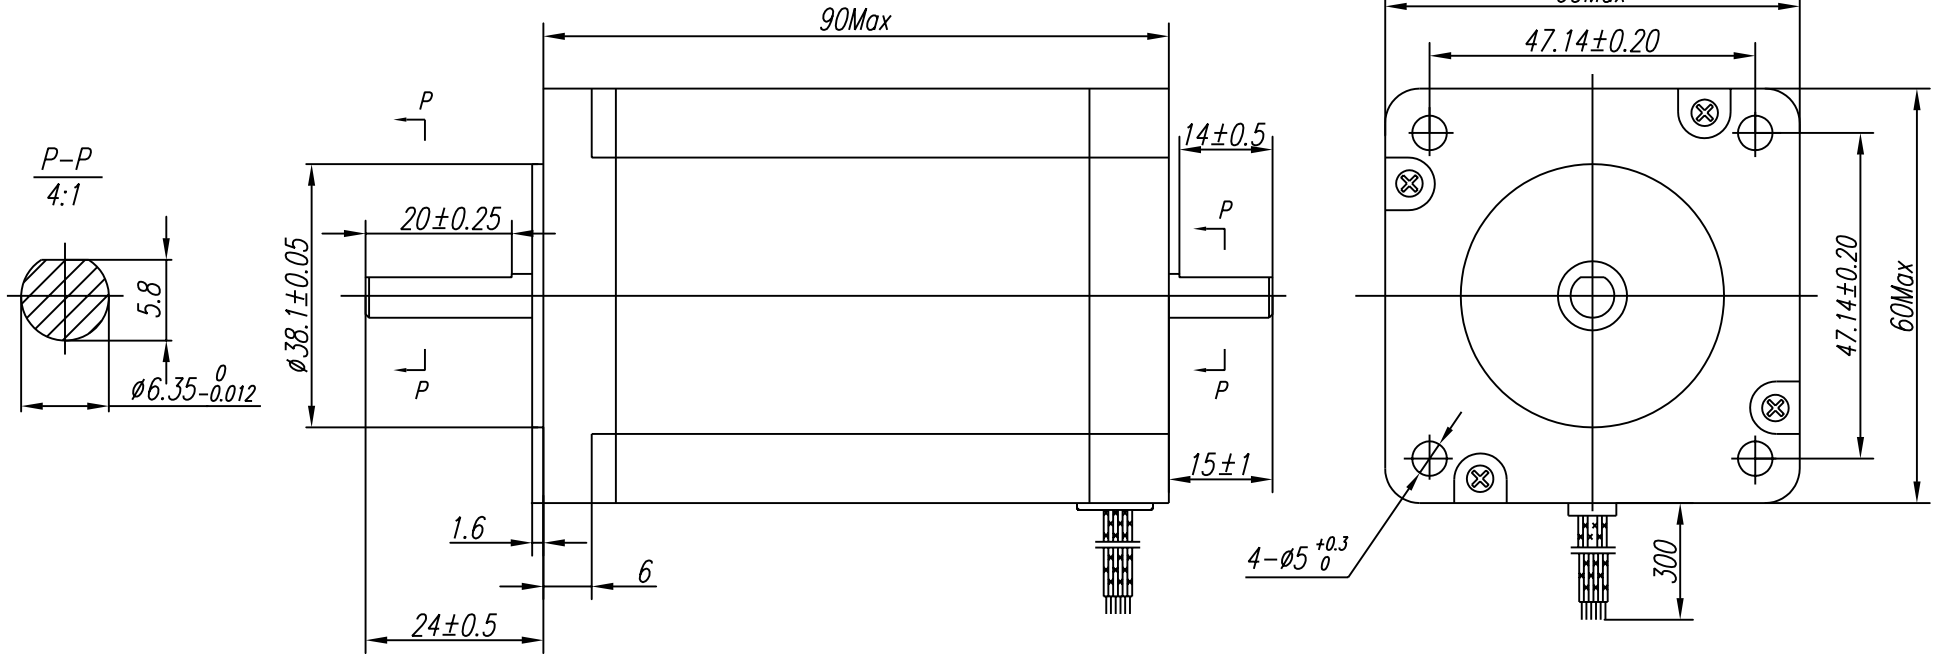

□ SPECIFICATIONS unit=mm

PHASE	2	PHASE	
STEP ANGLE	1.8±5%	°/STEP	
DETENT TORQUE	10	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG22 UL1007		
	UNIPOLAR RESP.ONE WINDING	BIPOLAR RESP.BIPOLAR SERIAL	BIPOLAR ONLY PARALLEL
CURRENT	3.0 A/PHASE	2.12 A/PHASE	4.2 A/PHASE
RESISTANCE	1.4 ±10% Ω/PHASE	2.8 ±10% Ω/PHASE	0.7 ±10% Ω/PHASE
INDUCTANCE	3.2 ±20% mH/PHASE	12.8±20% mH/PHASE	3.2 ±20% mH/PHASE
HOLDING TOGQUE	215 N.cm Min	300 N.cm Min	300 N.cm Min

□ COLORS OF LEAD WIRES BIPOLAR & UNI-POLAR

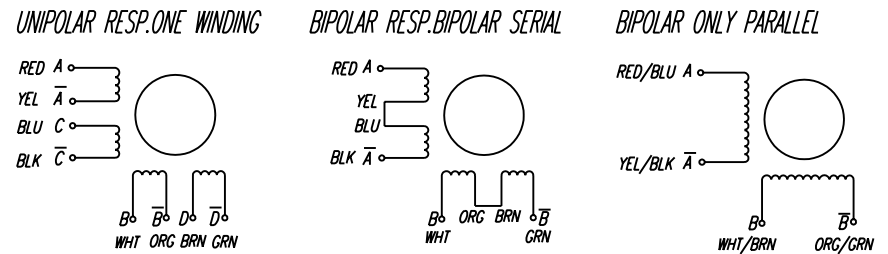

DATE 20070513  
EDIT A



23-305-DS8A

label:  
23-305-DS8A  
4.2V 3A 1.4R  
MADE IN CHINA  
HobbyCNC.com

REV	QTY.	NO.	SIG.	DT.
DESIGN		20070513		
PROC.			APPR.	
			CLS.MAK	WEIGHE
				SCALE
			EDIT.	OF PAGES